


**CUSTOMER :** DCE

PRODUCT-GROUP  
CAS

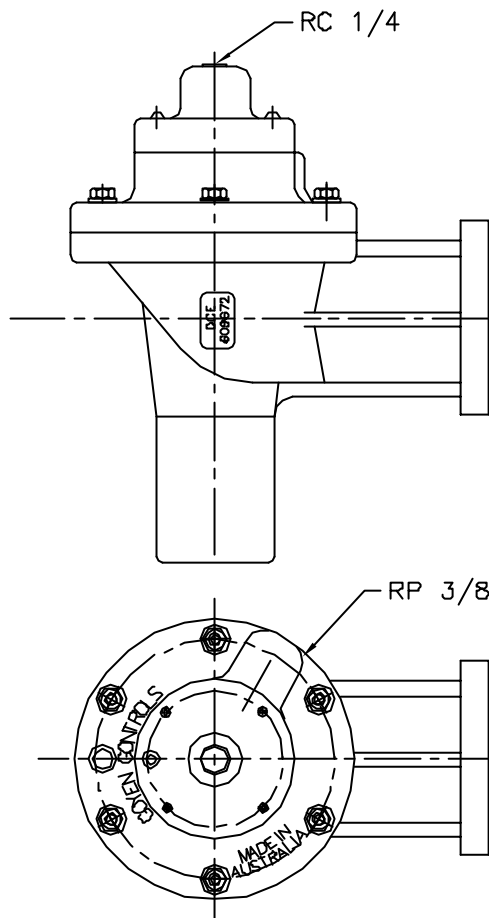

OPERATION TEST:

NO EXTERNAL LEAKS ALLOWED AT 125PSI.  
100% TEST WITH VALVE SUBMERGED IN  
WATER/5% VETO OR PRESSURE DECAY TEST.

APPLY LOCTITE 222 TO 4 SCREWS IN  
SECONDARY COVER

8	CORRECT LABEL TO 'DCE 609672	ECRO 6753 22.6.01	
7	REDRAWN ON AUTUCAD AND CHANGED TEST SPECIFICATION	ECRO 6430 6.9.00	CS
ISS	DETAILS OF CHANGE	ECRO DATE	AUTHORISED

DATE	6.9.00
DRAWN	S.L
D.O.CHECK	

LABEL	690238	RCA40FHX/1195
SCREWS	M560	1/4UNCx1 SOCK. HEAD
SCREWS	M1164	1/4UNCx1 HEX. HEAD
PLASTIC CAP PLUG	M549	
COVER	C609291-6	3/8 BSP F
COVER(SECONDARY)	E609353-3	1/4BSPT
BODY	609672	
DESCRIPTION	PART No	REMARKS

**PRODUCT :** RCA40FH X/

**SPEC. No** 1195